FASSI GROUP

PIAF 12RE

Vertical Mast Boom Lift

Built to last

MAIN FEATURES

Working height ..... 11,83 m / 38,81 ft
Horizontal outreach ..... 5,10 m / 16,73 ft
Gradeability ..... 30 %
0 Tail swing
Electric drive

▲ STANDARD EQUIPMENT

- Non-marking rubber wheels
- Platform with protection bar
- 200kg load capacity
- 48V 260 Ah Battery
- On-board H/F charger
- Centralized battery filling
- Non-continuous 352 ° turret rotation
- 30% gradeability
- Possible to work at maximum height
- On-board diagnostic colour LCD console
- Sling and tow rings
- Battery charge indicator
- Tilt indicator with alarm
- Overload sensor
- Flashing lights
- Hour meter

★ ACCESSORIES & OPTIONS

- Easy access to the platform by an entry gate
- Compressed air line
- Power supply in the platform
- Automatic 110 / 220 V charger
- Movement cut off when tilt > 2°
- Motion alarm
- Food grade oil
- Biodegradable oil
- Motion and movement alarm
- Anti-crushing (ACS) system
- Customer colour(s) paint

PIAF 12RE

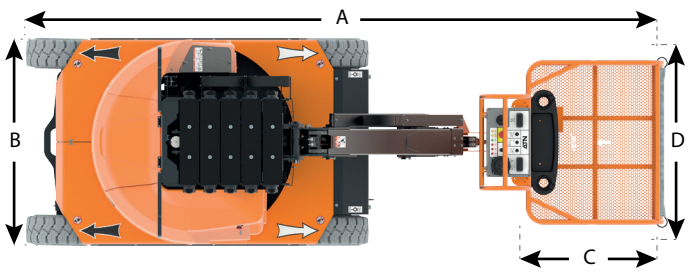

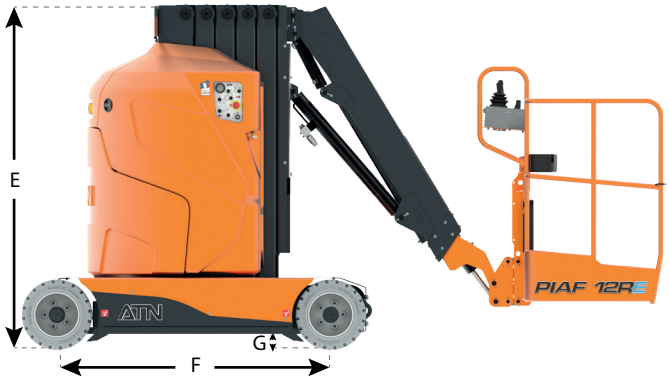

	Working height	11,83 m / 38,81 ft
	Floor height	9,83 m / 32,25 ft
	Maximum horizontal outreach	5,10 m / 16,73 ft
	Load capacity (Interior, 2 people, wind 0 km/h)	200 kg / 441 lbs
	Load capacity (Exterior, 1 people, wind < 45 km/h)	200 kg / 441 lbs

A	Length	3,66 m / 12 ft
B	Width	1,20 m / 3,93 ft
C	Platform length	0,80 m / 2,62 ft
D	Platform width	0,93 m / 3,05 ft
E	Height	1,98 m / 6,49 ft
F	Wheelbase	1,55 m / 5,08 ft
G	Ground clearance	8 cm / 0,26 ft

	Turret rotation	352° NC
	Drive speed (stowed)	6 km/h / 3,72 mph
	Drive speed (raised)	0,9 km/h / 0,56 mph
	Gradeability (stowed)	30%
	Maximum tilt	2°
	Inside turning radius (Ri)	0,66 m / 2,16 ft
	Outside turning radius (Re)	2,49 m / 8,16 ft
	Total weight	4350 kg / 9590 lbs
	Ground pressure	1569 kN/m²

CE

This product complies with European regulations in force .
Due to our constant improvement policy, ATN reserves the right to many any modifications without any prior notice.

RT : Working circle
Ri : Inside turning radius
Re : Outside turning radius

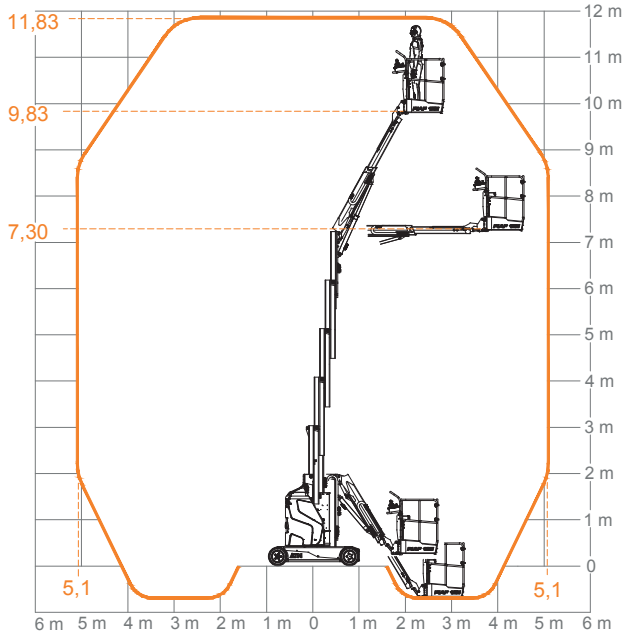

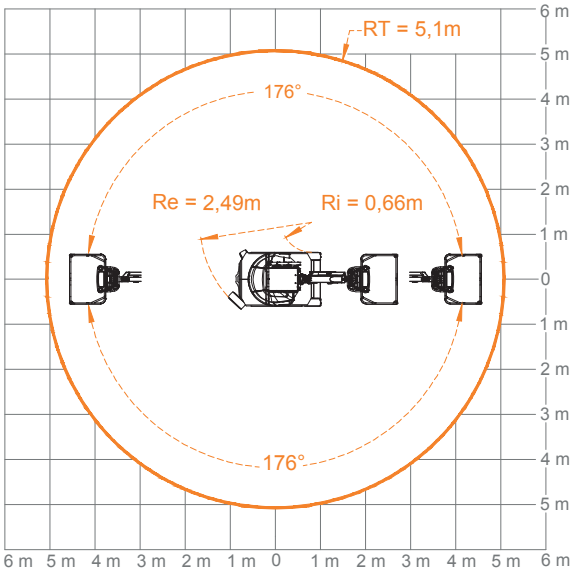

Lieu-dit Bacqué - Rue André Thévet - 47400 FAUILLET - FRANCE
Tél. : + 33 (0)553 798 320 - contact@atnplatforms.com - www.atnplatforms.com