



FASSI GROUP



**CX 12**

All-terrain  
scissor lift

*Built to last*

#### MAIN FEATURES


Working Height .....	12 m / 39.38 ft
Double extension .....	2 x 1.25 m / 2 x 4.10 ft
Total platform length .....	7.30 m / 23.95 ft
Total platform surface area .....	16 m <sup>2</sup>

#### ▲ STANDARD EQUIPMENT

- 4 x 4
- 1 oscillating axle
- Intuitive proportional controls
- Automatic stabiliser leveling
- Anti-slip floor
- 1 100 kg capacity
- Platform double extension
- 45 % gradeability
- 3° tilt
- 1° tilt on stabilisers
- Drive possible at full working height
- Load sensor
- Hour meter
- Alarm
- On-board diagnostic colour LCD console
- Removable control box
- Sliding rail engine block

#### ★ ACCESSORIES & OPTIONS

- Generator
- Power supply in the platform
- Extreme cold kit
- Extreme heat kit
- Flashing beacon
- Battery charger kit
- Motion alarm
- Platform working lights
- Non-marking tyres
- Customer colours paint

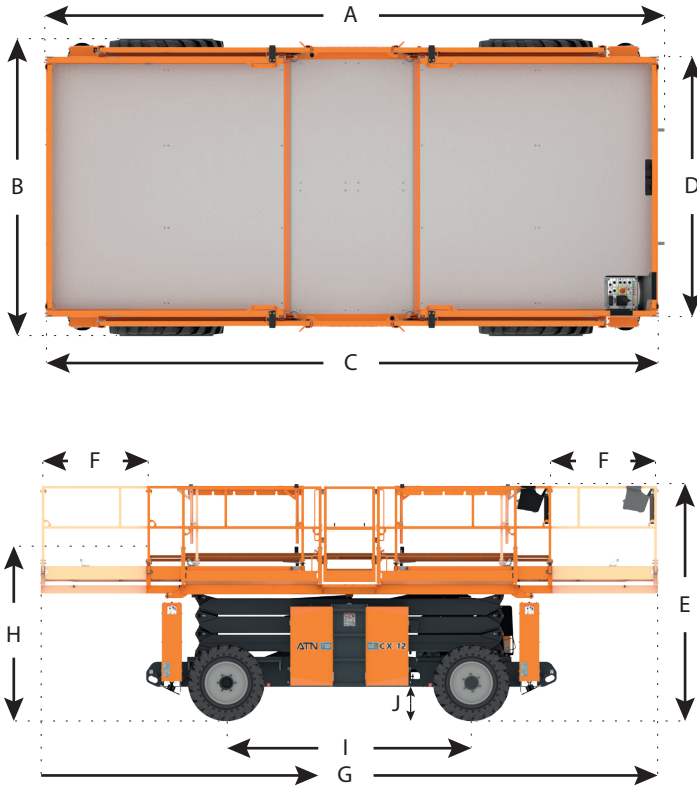

This product complies with European regulations in force.  
Due to our constant improvement policy, ATN reserves the right to  
many any modifications without any prior notice.

Working height	12,00 m / 39,38 ft
Floor height	10,00 m / 32,80 ft
Max load capacity	1100 kg / 2425 lbs
Extension load capacity	230 kg / 507 lbs

<b>A</b>	Overall length	4,86 m / 15,94 ft
<b>B</b>	Overall width	2,30 m / 7,54 ft
<b>C</b>	Platform length	4,80 m / 15,74 ft
<b>D</b>	Platform width	2,22 m / 7,28 ft
<b>E</b>	Height with guardrails in position	2,78 m / 9,12 ft
<b>F</b>	Front and rear extension	2 x 1,25 / 2 x 4,10 ft
<b>G</b>	Length with platform extension	7,30 m / 23,95 ft
<b>H</b>	Height with guard railings folded	2,02 m / 6,63 ft
<b>I</b>	Wheelbase	2,90 m / 9,51 ft
<b>J</b>	Ground clearance (machine centre)	0,36 m / 1,18 ft

Ascent / descent time	50 / 50 s
Drive speed (stowed)	6 Km/h / 3,72 mph
Drive speed (raised)	0,85Km/h/0,52mph
Gradeability (stowed)	45%
Maximum tilt allowed on wheels side to side//front to back	3° // 3°
Maximum tilt allowed on stabilisers side to side//front to back	1° // 2°
Inside turning radius (Ri)	2,50 m / 8,20 ft
Outside turning radius (Re)	5,60 m / 18,37 ft
Total weight	6 900 kg / 15 212 lbs
Ground pressure on stabilisers	687 kN/m <sup>2</sup>
Ground pressure on wheels	1 148 kN/m <sup>2</sup>

Wheel size	830 x 285 (530)
Diesel engine	KUBOTA
Fuel tank capacity	100 L
Hydraulic tank capacity	100 L

Ri : Inside turning radius  
Re : Outside turning radius

