

BASELIGHT™

320X

Minimal CO2 emissions


Large area illumination

Superior portability

Low energy consumption

Easy to transport & deploy

Maintenance free

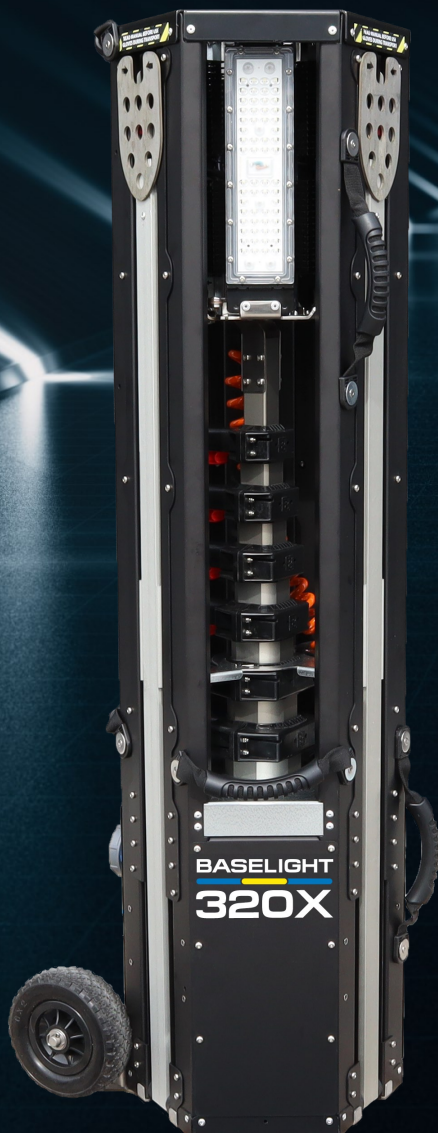

9 INDUSTRY,
INNOVATION
AND INFRASTRUCTURE



11 SUSTAINABLE CITIES
AND COMMUNITIES



13 CLIMATE
ACTION



PRIME
DESIGN SWEDEN AB

www.baselight.se

320X FEATURES

MAIN FEATURES

- Tilting & rotating armature
- 360 degree or floodlight
- Manual mast system
- Dirt & Waterproof
- Low transportation costs
- High wind resistance
- Aircraft-grade aluminium
- Fiber reinforced plastic parts

TECHNICAL SPECIFICATION

- Power consumption: 20 - 350W
- Lumens: 1000 - 45000 (Dimmable)
- Voltage: 110V-230VAC 50/60Hz
- Temperature range: -30 to +70
- Wind resistance: >30m/s
- Height: 1.2m - 4.4m
- Warranty: 3 years
- Weight: 33kg
- Rating: IP65



360° light-spread



Opens up to 180° light-spread



Rotating armature



Tilts to aim the light

